

## DS-1100KI(B) Network Keyboard




DS-1100KI(B) is a new generation network keyboard independently developed by Hikvision. It features in a 7-inch LCD touch screen and a 4-axis joystick. It supports network access to DVRs, DVSs, NVRs, network cameras, network domes, multi-functional video centers (MVCs), decoders, iSecure, and HikCentral and supports analog matrix and analog dome access, with powerful functions and quick and simple operations. It can be widely used in finance, telecommunication, transportation, electric power, education, water conservancy, and other fields.

- Supports video wall division by areas
- Supports window opening/closing, window movement, window scaling, window division, sub-window scaling and other operations
- Supports group operation, macro operation and other batch operations
- Supports the real-time preview of the camera image via the keyboard
- Supports switching the camera location ID by using the PREV button and NEXT button on the keyboard
- Supports PTZ direction control via the 4-axis joystick
- Supports decoder playback via the video wall
- Supports the playback of the DVR and NVR video files via the keyboard and supports the picture capturing and clipping
- Supports device access via the SDK and ONVIF standard protocols
- Accessible to iSecure and HikCentral
- Allows 32 users (1 administrator and 31 operators) to manage a maximum of 4000 devices
- Supports adding, modifying, and deleting the camera locations in batches
- Supports import/export of configuration files

## ▪ Specification

Model		DS-1100KI(B)
Device Parameter	Display	7 inch LCD
	Control Method	Network method, serial control
	Power Supply	12 VDC
	Consumption	≤ 15 W
	Dimension	435 mm × 193 mm × 110 mm (17.13 inch × 7.60 inch × 4.33 inch) (L × W × H)
	Weight	2 kg (4.41 lb.)
	Compatible System	Linux system
Decoding Parameter	Performance	4 × 1080p
Environmental Parameter	Working Temperature	-10 °C to 55 °C (14°F to 131°F)
	Working Humidity	10% to 90%
External Interface	Network	RJ45 100 M/1000 M self-adaptive Ethernet interface × 1
	Wi-Fi	Not supported
	Serial Port	RS-485, RS-422
	Two-Way Audio Input	3.5 mm stereo, supporting the audio communication
	Two-Way Audio Output	3.5 mm stereo, supporting the audio communication
	Joystick	4-axis single button joystick
	USB Interface	USB 2.0 × 1

## ▪ Typical Application

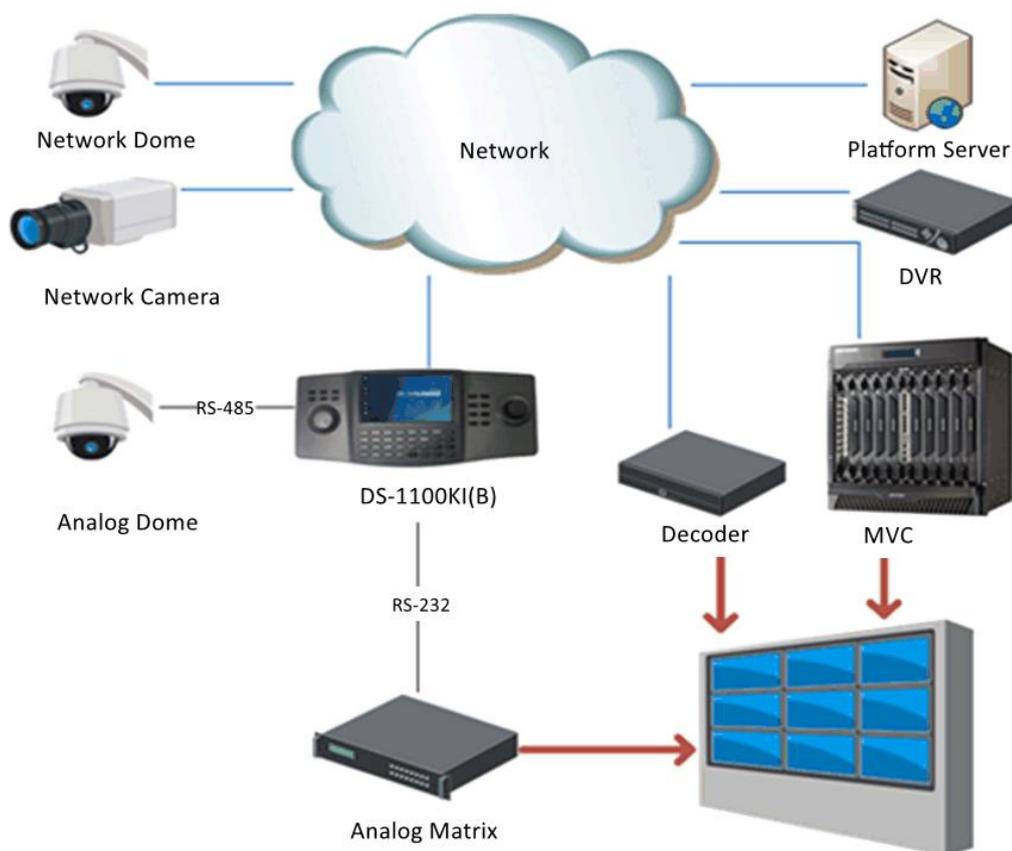

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



▪ **Available Model**

DS-1100KI(B)

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq