

DS-MCW407(A) **Android 4G Big Button Body Camera**



- 2K recording.
- The recorded videos can be uploaded to the central video platform via 4G wireless communication.
- Supports IR night vision. Even in the dark scene, the facial features of the persons in the scene can be recognized clearly.
- Tri-proof design to support all-weather field operation.
- Built-in battery with large capacity, supporting longer working hour.
- Small size, light weight, and convenient to carry.
- Large recording button for convenient operation.

▪ Specification

CPU	
CPU	8 cores, 64 bit, Main frequency: 1.8 GHz
Camera	
Image Sensor	1/3" progressive scan CMOS
Max. Recording Resolution	2688 × 1512
Min. Illumination	Color: 0.11 Lux @ (F2.2, AGC ON), 0 Lux with supplement light
Day & Night	Switch IR cut filter automatically
Zoom	4× digital
White Light	1 white light(s)
Lens	
Focal Length	2.4 mm fixed lens
FOV	Horizontal FOV: 126°, Vertical FOV: 70°, Diagonal FOV: 144°
Aperture	F2.2
Video	
Video Compression	H.264, H.265
Main Stream	60 Hz: 30 fps (2688 × 1512, 1920 × 1080, 1280 × 720, 720 × 576)
Sub-Stream	30 fps (1920 × 1080, 1280 × 720, 720 × 576)
Pre-record & Post-record	Pre-record: 60/10/5/3 s, Post-record: 60/10/5/3 s
Video Format	MP4, PS
Audio	
Audio Compression for Video Recording	G722,AAC
Audio Compression for Audio Recording	PCM
Audio Compression for Group Intercom	G711.A, G711.U, G722
Audio Bit Rate	G722 (16 kbps), AAC (dynamic), PCM (256 kbps), G711.A (64 kbps), G711.U (64 kbps)
Image	
Image Format	JPEG
Image Resolution	5 MP, 16 MP, 30 MP, 40 MP
Image Stabilization Algorithm	
Image Stabilization Algorithm	GIS: Optional
Screen	
Screen Size	2.0"
Display Resolution	320 × 240
Touchscreen	Supported
Screen Brightness	Typical value: 500 cd/m ²
Storage	
RAM	2 GB

ROM	32 GB by default, 64/128/256 GB optional
IR	
IR Range	Up to 10 m
IR Wavelength	850 nm
Wireless Network	
Bluetooth	BT4.2
Wi-Fi Protocol	802.11 a/b/g/n/ac
Positioning Mode	GPS
Cellular Network	GSM: 850/900/1800/1900, WCDMA: B1/B2/B4/B5/B8, FDD-LTE: B1/B2/B3/B4/B5/B7/B8/B20/B28, TDD-LTE: B38/B39/B40/B41
Wi-Fi Frequency Band	2.412 to 2.472 GHz, 5.15 to 5.25 GHz, 5.725 to 5.875 GHz
NFC	Optional
Network	
Protocol	HTTPS, RTSP, NTP, FTP
API	ISAPI, SDK, ISUP
Security	
Encryption	AES128, AES256
Watermark	Supported
Interface	
Audio Type	1 built-in mic(s), 1 speaker(s)
USB	1 USB 2.0 port(s)
Indicator	2 indicator(s) for charging/working/recording/exception
Button	Power, Video recording, Audio recording, Picture capture, PTT, SOS, Fn
SIM Card	Only available for models with /GLE /5G, 1 Nano-SIM card(s)
Charging Interface	Type-C, Pogo Pin
Smart Functions	
Face Picture Capture	Supported
Face Picture Recognition	Optional
License Plate Recognition	Optional
Event	
Basic Event	SOS alarm
Group Intercom	
Group Intercom	Supported for firmware version V2.6.0 or above
General	
Operating System	Android 9.0
Power	5 V DC, 2.0 A, max. 10 W
Vibration Motor	Optional
Dimensions	82.6 mm × 58 mm × 32.7 mm (3.25" × 2.28" × 1.29")
Weight	165 g (without mounting) (0.4 lb.)
MIC	Supported
Gyroscope	Optional
Speaker	1 built-in speaker(s), max. power consumption: 1 W, max. sound pressure level: 87 dB (10 cm)
Client	HikCentral Pro, HikCentral Master


Battery	
Capacity	3220 mAh
Battery Type	Lithium-ion battery, integral
Charging Time	≤ 4 h
Battery Duration	Up to 12 h in 720p resolution ¹
Approval	
RF	EN 300 328 V2.1.1 (BT or 2.4G), EN 62311: 2008 (BT or 2.4G), EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 50130-4: 2011 + A1: 2014)
EMC	EN 61000-3-2: 2019, EN 61000-3-3: 2013, EN 50130-4: 2011 + A1: 2014, CE-EMC: EN 55032: 2015
Safety	CB: IEC 62368-1: 2014+A11, CE-LVD: EN 62368-1: 2014/A11: 2017, IEC 62368-1: 2018, EN IEC 62368-1: 2020 + A11: 2020, CE-LVD: EN 62368-1: 2014/A11: 2017
Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006
Protection	IP68: IEC 60529-2013
Drop Test	
Drop Test	MIL-STD-810G, 2 m drop test
Warranty	
Warranty	2 years for the device without battery, 1 year for the battery

1: This is a basic estimation of battery life only when recording is on. Additional power consumption should be considered when IR, GPS, and/or network connection is on.

▪ Available Model

DS-MCW407/32G/GLE(A)

Dimension

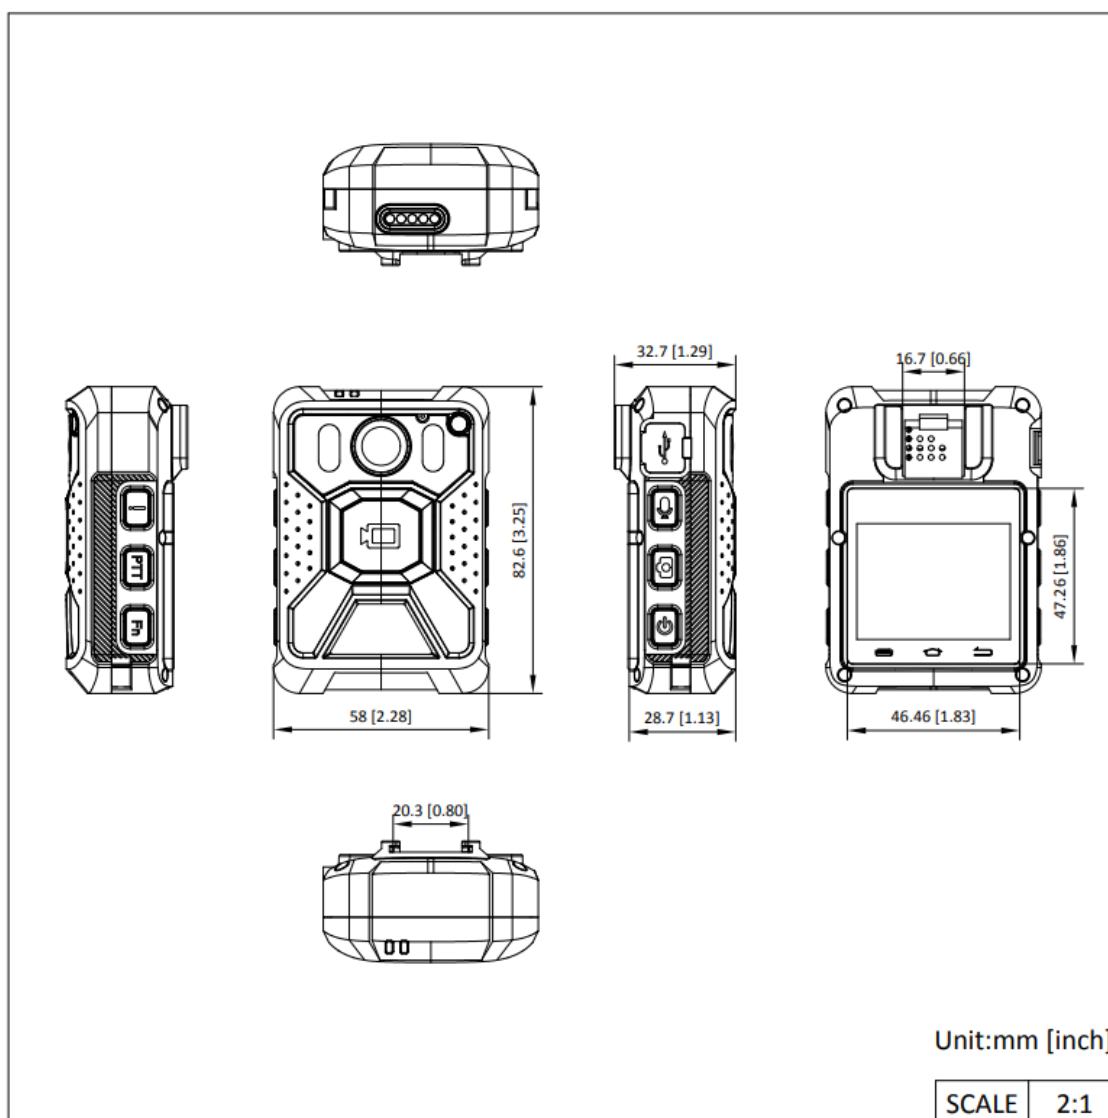

▪ Accessory

▪ Included

DS-MH1712
Shoulder Clip



▪ Optional

DS-MH1710-HM-S 22 Series Body Camera Metal Clip	DS-MH1711 Body Camera Chest Harness	DS-MH1721 Oblique Shoulder Harness	DS-MH1411-B1 Body Camera Charge Cradle	DS-MH1714 Body Camera Clip- Fast Click
DS-MH1412-B1 6 Ports Body Camera Charge Cradle	DS-MH1310-B1 Body Camera Battery	DS-MH1712 Clip of Body Camera	DS-MH1717 Body Camera - Magnetic Clip	DS-MH1716 Body Camera - Alligator Clip
DS-MH1715 Body Camera -Wearable Clip				

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®